




Características principales

- Relación ultrapanorámica 21:9, pantalla de 105 pulgadas con resolución 5K para una mayor capacidad de multitarea y colaboración
- Videoconferencias sin interrupciones con un sistema completo de 8 micrófonos
- Experiencia de escritura natural gracias a la tecnología Ultra Fine Touch con 40 puntos táctiles
- Compartir fácilmente la pantalla de forma inalámbrica con hasta 9 dispositivos mediante vCast
- 2 puertos USB-C para la máxima productividad



Descripción del producto

The ViewBoard IFP105S delivers an expansive interactive experience with its 21:9 aspect ratio and stunning 5K resolution. The 105" display allows for multitasking with split-screen functionality, enhancing collaboration and productivity. With highly responsive 40-point touch capabilities, every input is registered naturally and intuitively. Enjoy seamless wireless screen casting and sharing through vCast. Designed for both in-person and hybrid collaboration, the ViewBoard IFP105S is an ideal solution for meeting rooms, enabling seamless presentations, ideation, and decision-making.

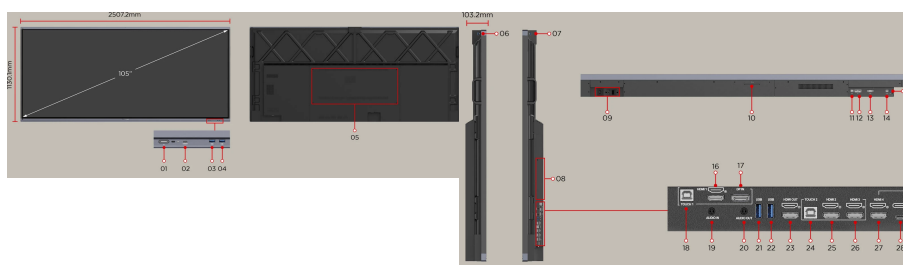

- | | | |
|-----------------------------------|---------------|------------------|
| 1. Power | 10. WiFi Slot | 20. Audio Out |
| 2. USB Type-C 2 | 11. SPDIF | 21. USB 3.0 |
| 3. USB3.0 | 12. LAN | 22. USB 3.0 |
| 4. USB3.0 | 13. RS232 | 23. HDMI Out |
| 5. VESA® Wall Mount (1000x400 mm) | 14. Touch 3 | 24. Touch 2 |
| 6. USB3.0 | 15. USB 2.0 | 25. HDMI 2 |
| 7. USB3.0 | 16. HDMI 1 | 26. HDMI 3 |
| 8. Slot-in PC | 17. DP IN | 27. HDMI 4 |
| 9. AC Power | 18. Touch 1 | 28. USB Type-C 1 |
| | 19. Audio In | |

DISPLAY

Tamaño del panel:	105"
Tipo de panel:	TFT LCD Module with DLED Backlight, VA
Área de visualización (mm):	2449.92(H) x 1033.56 (V) (104.6" diagonal)
Relación de aspecto:	21:9
Resolución:	WUHD 5120x2160(Pixels)
Colors:	1.07B colors
Brillo:	400 nits
Relación de contraste:	4000:1(Typ.) 5000:1(Min. with DCR enabled)
Tiempo de respuesta:	6.5ms
Ángulos de visión:	H = 178, V = 178 (Typ.)
Vida útil de la retroiluminación:	50,000 Hours (Min.)
Tratamiento de superficies:	Panel Hard Coating 3H Glass Anti-Glare 7H
Bisel:	19.5/19.5/29.8/41.2 mm
Orientación:	Landscape
Disclaimer:	50,000 hours backlight life at 8 hours of use per day

PLATAFORMA

Procesador:	Octa-Core CPU (A76*4 + A55*4)
RAM:	8GB LPDDR
Almacenamiento:	64GB eMMC

TOUCH

Tipo/Tecnología:	IR Recognition
Resolución táctil:	32767 x 32767
Puntos táctiles:	Windows: 40 Android: 20

INPUT

HDMI:	x4 (Rear x3 :HDMI 2.0 with CEC; Rear x 1 HDMI 2.1 with CEC)
DisplayPort:	1
Audio:	1
MIC (Micrófono):	Built-in 8 Array Microphone
RS232:	1
OPS:	X1 OPS Slot
WiFi:	X1 Module Slot

OUTPUT

HDMI:	1
Audio:	1
SPDIF:	1

LAN

RJ45:	X2 (inx1; outx1; 1000m for Android/PC; 100m for type-C)
-------	---

USB

Tipo A:	USB2.0 x 1 (Bottom) (for FW upgrade) USB3.0 x 6 (Top x 2 + Rear x 2 + Front x 2), all support Smart USB
Tipo B:	3 (Bottom x 1; Rear x 2)
Tipo C:	2 [Rearx1: PD65W(65W with OPS, 100W without OPS) + DP1.2 + Data + 10M/100M sharing ; Front x1:PD15W + DP1.2 + Data + 10M/100M sharing]

ALTAVOCES

16W x 2 + 15W x 1 subwoofer

TOP CAMERA PLATE

Yes

SISTEMA OPERATIVO INTEGRADO

Android 13

PAQUETE DE SOFTWARE

Software de Presentación inalámbrica: ViewBoard Cast:	Single screen sharing with Chromecast or up to 9 devices with vCast Sender or Airplay. No additional download is required to cast using Airplay or Chromecast.
---	--

CARACTERÍSTICAS ESPECIALES

All-in-one USB port:	Yes
Un clic para Cloud Drive:	Yes
Intercambio de LAN simple entre IFP y dispositivo de entrada:	(10/100/1000M) (USB Type-C 10/100, Android & PC 10/100/1000)
Light Sensor:	x1

ALIMENTACIÓN

Voltaje:	100-240VAC +/- 10% Wide Range
Consumo:	On: 275W(typ.) / Off: <0.5W

ERGONOMICS

Montaje en pared (VESA®):	1000 x 400
---------------------------	------------

OPERATING CONDITIONS

Temperatura (° C):	0°C to 40°C
Humedad:	20% ~ 80% RH non-condensing

DIMENSIONES (W X H X D)

Físico (pulgadas / mm):	98.71 x 44.49 x 4.06 in / 2507.2 x 1130.1 x 103.2mm
Embalaje (pulgadas / mm):	105.19 x 51.38 x 11.02 in / 2668 x 1305 x 280mm

WEIGHT

Neto (lb / kg):	201.5lb/91.4Kg
Bruto (lb / kg):	225.1lb/115.7Kg

REGULATIONS

cTUVus, FCC/ICES003, LBL(low blue light filter), FF(Flicker free), CE EMC, CB, RoHS Green BOM, RoHS DoC, ErP, REACH SVHC List, DoC, EEL, WEEE, BSMI

VERSIÓN ENERGY STAR

ES 8.0

CONTENIDO DEL EMBALAJE

1. 3m power cord by ship area
2. Remote control with AAA battery
3. 3m touch USB cable
4. Touch pen x 2
5. Quick Start Guide + Compliance statement
6. RS232 adapter
7. Clamp x 5
8. Camera Plate
9. Screw x 6 (2 for camera , 4 for wall mount)
10. HDMI cable 3m